

StarProg-F

FLASH Engineering Programmer



StarProg-F

is a FLASH engineering IC programmer supports a variety of Flash IC on the market, like EEPROM, SPI NOR/NAND Flash, Parallel NOR/NAND Flash, eMMC/eMCP, etc. Powered by USB port and does not need external power. StarProg-F provides users detailed Command Line for software redevelopment. Palm size and space saving. Whether engineering development or low volume production, Starprog-F offers user the best solution.

Features

● High programming speed

Built in high speed processor to achieve high programming speed
Timing reference (P+V)

MX25L1655D 8.5s

S29GL064S 16.4s

S34ML01G200T 44s

● Support all Flash IC and packages

1. Support EEPROM, SPI NOR/NAND Flash, Parallel NOR/ NAND Flash, eMMC, eMCP, etc .
2. Support DIP, SOP, SSOP, TSOP, PLCC, QFN, BGA package, etc.
3. Regular device update

● Support a variety of file formats

Binary, Intel Hex, Motorola, ROM, etc

● Support 1.8V low voltage IC

● Provide detailed Command Line


User can use 3rd party software to control the programmer through Windows command line

● Powered by USB port, need no external power


● Unlimited number of StarProg-F can be driven by 1PC



Multiple StarProg-F

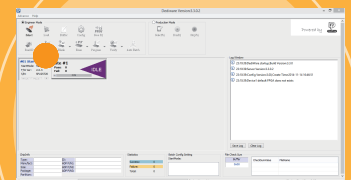

Window GUI



Detailed Command Line



**Dediprog
Technology**

Dediprog Technology Co., Ltd (Taiwan) TEL: 886-2-2790-7932 FAX: 886-2-2790-7916

4F., No.7, Ln. 143, Xinming Rd., Neihu Dist., Taipei City 114, Taiwan

Dediprog Technology (ShangHai) TEL: 86-21-51600157 FAX: 86-21-61263530

Room 503, Block E, No.1618, Yishan Road, Shanghai, China

www.dediprog.com E-Mail: sales@dediprog.com

StarProg-F

FLASH Engineering Programmer

Specification

Hardware

Architecture
Programming Interface
IC Adaptor
Communication Interface
External Memory Card
Operation Interface
Hardware Protection
Vcc
Current Limitation on Vcc
Vpp
Current Limitation on Vpp

ARM and FPGA architecture with high density SDRAM
Socket adaptor
DIP, SOP, SSOP, TSOP, PLCC, QFN, BGA, etc
High speed USB 2.0
4GB micro-SD card
Busy/Pass/Error LED, Start key
Overcurrent and ESD protections
1.6~5V
~300mA
1.6~12V
~100mA

Supported IC

EEPROM, SPI NOR/NAND Flash, Parallel NOR/NAND Flash, eMMC, eMCP, etc

Software

Operation Software
OS Supporting
File Typed Supported
Programming Function
Extra Function

Dediware
Windows XP/ Vista / 7 / 8 / 8.1 / 10
Binary, Intel Hex, Motorola, ROM, etc.
Contact Testing, Blank Check, Erase, Program, Verify, Option/Protection
Multiple StarProg-F, serial number and Unique key (ex. HDCP) programming

Power

USB 5V or DC 5V/2A

Dimension

135mm*75mm*17mm

Weight

101g

Standard Accessories

1. StarProg-F main unit*1
2. USB cable*1
3. CD-ROM (Include Dediware software and user manual)*1
4. Power Adaptor*1
5. 4GB SD card*1



Dediprog Technology Co., Ltd (Taiwan) TEL: 886-2-2790-7932 FAX: 886-2-2790-7916

4F., No.7, Ln. 143, Xinming Rd., Neihu Dist., Taipei City 114, Taiwan

Dediprog Technology (ShangHai) TEL: 86-21-51600157 FAX: 86-21-61263530

Room 503, Block E, No.1618, Yishan Road, Shanghai, China

www.dediprog.com E-Mail: sales@dediprog.com



**Dediprog
Technology**